

**VILLAGE OF WINDSOR
VILLAGE BOARD RESOLUTION 2020-67**

AUTHORIZATION TO PURCHASE A TOW BEHIND ROADSIDE MOWER

WHEREAS, the Public Works Director has researched and obtained quotes for the replacement of the Woods Tow Behind Roadside Mower as shown in Exhibits A and B; and

WHEREAS, the Village Board budgeted \$15,000 in 2020 in the Reserve/Replacement Fund for the purchase of a new Tow Behind Roadside Mower; and


WHEREAS, the Public Works Director and the Public Works Committee recommend the purchase of a Schulte FX-212 for \$10,500.00 from Mid-State Equipment using our current Woods mower as a trade in.

NOW THEREFORE, BE IT RESOLVED, by the Village Board of the Village of Windsor that it hereby resolves as follows:

The Public Works Director is authorized and directed to purchase the Schulte FX-212 as provided in Exhibit A from Mid-State Equipment for 10,500.00, after the trade-in of \$7,000.

The above and foregoing Resolution was duly adopted at a regular meeting of the Village Board of the Village of Windsor on August 20, 2020, by a vote of 5 in favor and 0 opposed.

VILLAGE OF WINDSOR


Robert E. Wipperfurth, President

Attested by:


Christine Capstran, Clerk

Incorporated by Reference:

Exhibit A: Mid-State Equipment quote
Exhibit B: Carl F. Statz email quote

Exhibit A

Mid-States



SCHULTE
 Box 70 • Englefeld SK • Canada • S0K 1N0
 Phone: 308-287-3715 • Fax: 308-287-3355

USA QUOTE SHEET



FX-212 ROTARY CUTTER

Bill To:

Ship To:

Mid- State Equipment W1115 Bristol Road Columbus WI 53925 920-623-4020	Mid- State Equipment W1115 Bristol Road Columbus WI 53925 Re: VILLAGE OF WINDSOR
Federal ID#:	Federal ID#:

REQUESTED SHIP DATE: ASAP	SHIP VIA: Truck
CUSTOMER PO#:	REP PO#:
DUE DATE: 30 Days	REP INFO: Edney
TERRITORY REP: Bob Enns	PROD RUN: Next Run
DATE: July 24 2020	DISCOUNT
Shipping Terms: FCA FACTORY	

QTY	PART #	Wt/Lbs	DESCRIPTION	USA LIST	QUOTE/NET
1	C319-100		FX-212, Basic Unit <i>Required</i>	13,427.00	
<i>REQUIRED PICK FOR NORTH AMERICA</i>					
1	5000-085		Safety Light Kit	439.00	
<i>Choose a Drive Package</i>					
1	C319-735		CW Rotation on Center, 540 RPM G8 Shaft <i>OR</i>	3,749.00	
1	C319-720		CW Rotation on Center, 1000 RPM G8 Shaft	3,774.00	
<i>Note. It using Equal Angle Hitch Skip to C185-196</i>					
1	C185-180		Tralling Hitch, CV Style <i>Required</i>	683.00	
<i>Plus One Shaft</i>					
1	340-870WG		CV Shaft, 540 RPM	1,251.00	
1	340-648WG		CV Shaft, 1000 RPM	1,025.00	
1	340-658WG		CV Shaft, 1000 RPM 1-3/4" Shaft	1,342.00	
<i>Plus One Clevis, Hitch or Tongue</i>					
1	C000-506WG		Open Clevis <i>Minimum Requirement</i>	331.00	
1	C000-500WG		Precision Hitch	599.00	
1	C000-510WG		Pro Level Hitch	434.00	
1	C000-513WG		Solid Tongue	326.00	
1	C185-196		Equal Angle Hitch 540 RPM ONLY! c/w Non CV Drive Shaft <i>(Note-Move to Chain Guards if Selected)</i>	2,425.00	
<i>Choose Chain Guards (must pick one) / Belting options</i>					
1	C319-500		Single Chains Front and Rear	638.00	
1	C319-550		Double Chains Front and Rear	849.00	
1	C319-560		Front Half Belting <i>(optional to order with chains)</i>	281.00	
1	C319-570		Rear Half Belting <i>(optional to order with chains)</i>	296.00	
<i>CHOOSE</i>					
1	C319-450		Pan Kit <i>Required</i>	1,115.00	
1	C319-460		Updraft Blades CW Center <i>Required</i>	253.00	
1	C319-810		Wing Wheel Standard, 1or2 tires <i>Required</i>	316.00	
1	C318-800		Duals Wheel Standard on Center <i>Required</i>	922.00	
<i>Choose an Axle Kit</i>					
1	C190-483		Axle Kit for 3 Tires	464.00	
1	C190-485		Axle Kit for 5 Tires	772.00	
1	C180-486		Axle Kit for 6 Tires	906.00	
<i>Choose Tire Quantity Needed</i>					
6	210-003WG		Solid Laminated Tire, 6 x 9 x 20	218.00	
6	210-175WG		Forklift Tire 6.5 x 10, 12 ply on 2 pce 5 bolt rim	302.00	
6	210-175FWG		Foam Filled Forklift Tire 6.5 x 10 - 12 ply on 2 pce 5 bolt rim	525.00	
6	210-540WG		Tire 24x8-14 20 Ply Rated Severe Duty	389.00	
6	210-540FWG		Tire 24x8-14 20 Ply Rated Severe Duty Foam Filled	572.00	
6	210-192WG		Solid Laminated Tire, 6 x 9 x 26	366.00	
<i>CHOOSE</i>					
1	C319-NA		N/A & Aust Destination Kit <i>Required</i>	36.00	

PFX212-001	OEM Value Packs are Invoiced Through the Parts Dept.	601.77
PFX212-002	FX212 Schulte Rotary Cutter (Pan, CW Center, CCW Wing)	601.77
	FX212 Schulte Rotary Cutter (Pan, CW Center, CW Wing)	601.77

Weight Total / LBS.	Total Extended List / Dealer Net	27,610.00
* I acknowledge that I have ordered the equipment described on this quote, and agree to the terms and conditions listed above.	Program Discount / Net of All Discounts	
	Assembly	200.00
	Freight (Approximate)	-
	Total Quote Retail List / Invoice	27,610.00

Customer Signature _____

Print Name _____

Date _____

SALE \$17,500
 Trade - 7000
 N.A. ... - 10500
 Freight 800
 28,410.00
 Lev. mm 7/6/2020


Specifications




FX-318 mowing Macadamia Orchards

SPECIFICATIONS

	FX-318	FX-212
Cutting Width	216" (5.5m)	144" (5.5m)
Overall Width	228" (5.8m)	160" (5.8m)
Overall Length	208" (5.3m)	208" (5.3m)
Transport Width	86" (2.2m)(Singles on wings) 96" (2.4m)(Duals on wings)	90" (2.2m)(Singles on wings) 95" (2.4m)(Duals on wings)
Transport Height	109" (2.77m)	109" (2.77m)
Deck Thickness	7GA (3/16", 4.6mm)	7GA (3/16", 4.6mm)
Weight	5800 lbs (2631kg) (Depends on configuration)	5750 lbs (2614kg) (Depends on configuration)
Hitch Weight	2350 lbs (1066kg)(Depends on configuration)	2234 lbs (1066kg)(Depends on configuration)
Minimum Tractor HP	75HP (56kW)	70HP (56kW)
Recommended Tractor HP	90HP (67kW)	85HP (67kW)
Tractor PTO Speed	540 or 1000rpm	540 or 1000rpm
Cutting Height	1 75" to 16.75" (44.5mm to 425mm)	1 75" to 16.75" (44.5mm to 425mm)
Ground Clearance	14 75" (42.5mm)	14 75" (42.5mm)
Cutting Capacity	3.5" (89mm)	3 5" (89mm)
Blade Overlap	6" (152mm)	6" (152mm)
Divider Gearbox Rating	260HP (194kw)	260HP (194kw)
Center & Wing Gearbox Rating	210HP (157kw)	210HP (157kw)
Output Shaft	2.38" (60.3mm)	2.38" (60.3mm)
Blade Tip Speed	540 rpm	540 rpm
Center	15980 ft/min (4871m/min)	15980 ft/min (4871m/min)
Wing	16319 ft/min (4974m/min)	16319 ft/min (4974m/min)
Blade Tip Speed	1000 rpm	1000 rpm
Center	15974 ft/min (4869m/min)	15974 ft/min (4869m/min)
Wing	16581 ft/min (5054m/min)	16581 ft/min (5054m/min)
Wing Working Range	25° down to 80° up	25° down to 80° up
Wing Floating Range	25° down to 30° up	25° down to 30° up
Drive Size Main	Cat. 6 CV (1000rpm) Cat. 6 CV (540 rpm)	Cat. 6 CV (1000rpm) Cat. 6 CV (540 rpm)
Drive Size Center & Wings	Category 5	Category 5
Side Skirt Depth & Thickness	13.63" x .25" (346mm x 6.35mm)	13.63" x .25" (346mm x 6.35mm)
Suspension	Rubber 3 puck grommet	Rubber 3 puck grommet



Ultra Narrow Transport Width



Forklift Tires



Aircraft Tires



Solid Laminate Tires


HITCH OPTIONS



Adjustable Clevis



Precision Hitch



Solid Tongue



Clevis Hitch



Pro Level Hitch

FX 318 OPTIONS

Through axles; Aircraft or solid laminate tires or forklift tires; 4, 6 or 8 tire options; Single or double safety chains front and rear; Safety light kit; Standard clevis, Adjustable clevis, Precision hitch (eliminates drawbar wear), or solid tongue; Shredder blade kit, Equal Angle Hitch - Non CV drive 540 RPM only, Strut Mount for Flex Arm (Factory or Field Installed); 1/2 length front or rear belting



FX-318 Mowing Cattails



Schulte Industries Ltd.
PO Box 70, Englefeld, SK Canada S0K 1N0
Ph (306) 287-3715 Fx (306) 287-3355
Email info@schulte.ca Web www.schulte.ca



Sold By:
1 yr WARRANTY ON MACHINE
6yr WARRANTY ON gear box

Schulte is a registered trademark of Alamo Group Inc. Schulte Industries Ltd. reserves the right to change the design and specifications of its products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment. Printed in Canada Prepared by NELSON GRAPHIC DESIGN 201908



Exhibit B

Carl F STATZ

Dave Jennings

From: Jared Hitchins <jared.hitchins@carlfstatz.com>
Sent: Tuesday, July 28, 2020 2:59 PM
To: Dave Jennings
Subject: Woods

Per our phone conversation, the following machines are priced as follows:

Woods BW10.70: **\$14,900**


Woods BW13.70: **\$16,700**

Please let me know if you have any questions.

Thanks
Jared

1 yr WARRANTY on Machine.
6 yr WARRANTY on gear box.

WOODS

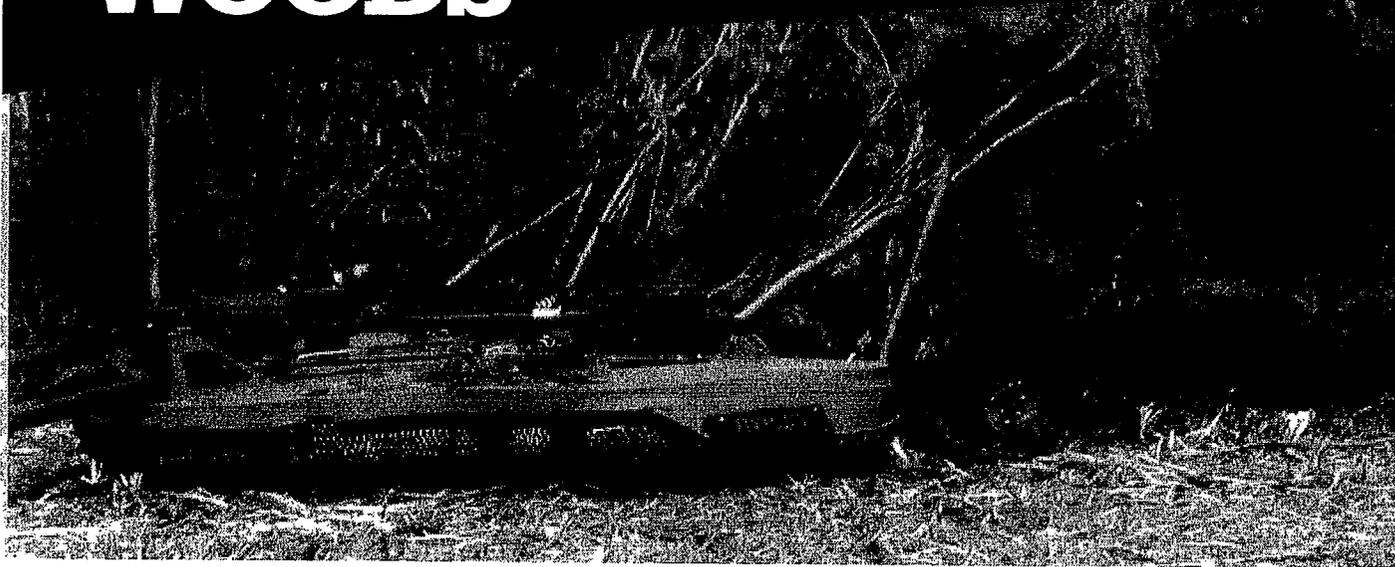

**TRACTOR PTO HP RANGE:
55 - 275 HP**

Models

BW10.60/BW15.60 | 15-foot flex-wing rotary cutter

The BW15.60 easily powers through tall brush and trees up to 4 inches in diameter.

**TRACTOR PTO HP RANGE:
65 - 300 HP**

Models

BW10.70/BW15.70 | 15-foot flex-wing rotary cutter


The rugged BW15.70 can tame the harshest conditions – heavy brush and trees up to 4.5 inches in diameter. Ideal for professional and contract cutting.

1 | Sloped Deck

Smooth and sloped seven-gauge steel decks shed water and debris; deck design and baffling helps recut material, ensuring a finer shred and more even distribution

2 | Gearboxes

Massive, heavy-duty gearboxes with 3-inch output shaft deliver more cutting power and performance with a six-year limited warranty

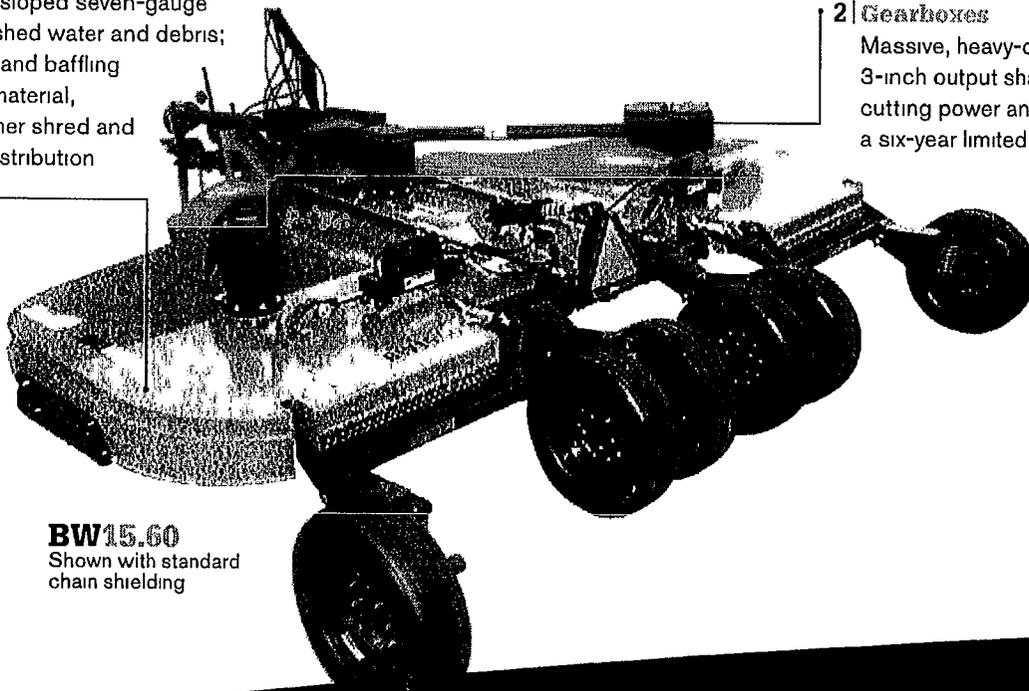

BW15.60
Shown with standard chain shielding

The new customer-designed 15-foot Batwing


SPECIFICATIONS		
MODEL	BW10.60* / BW15.60	BW10.70* / BW15.70
Tractor PTO HP	55-275	65-300
Cutting Height	2" - 15"	
Cutting Capacity (inches)	4" dia	4.5" dia
Cutting Width (inches)	126" - 180"	
Blade Tip Speed	15,700 fpm at 540 rpm 16,000 fpm at 1000 rpm	
Weight	4,400 lbs / 4,600 lbs	5,290 lbs / 5,500 lbs
Tongue Weight	1,350 lbs	1,480 lbs
Center Deck / Wing Deck	7 gauge	1/4"
Side Skirt Thickness	1/4"	
Side Skirt Depth	13"	
Transport Width	36"	
Stump Jumper	round	
Flex	90° up / 22° down	
Driveline Rating	CAT 6 CV main CAT 4 wing	CAT 6 CV main CAT 5 wing
Splitter Gearbox Rating	275 hp	
Wings Gearbox Rating	225 hp	
Output Shaft Size	3" dia	
Gearbox Warranty	6 years	
Options	<ul style="list-style-type: none"> ▪ double row chain shielding ▪ dual wheels ▪ LED lights ▪ shredding kit ▪ deck ring ▪ spring axle ▪ full walking tandem axles 	

*Single-wing

- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greaseable Quick-Change blade pins are easy to remove.

Plus,

- Beefy, heavy-duty skid shoes prevent gouging and protect the deck.
- Strategically placed, welded baffles cut and distribute debris evenly.
- Center and wing decks feature high-strength 7 gauge steel (.60) or .26 inch thick steel (.70) for added durability.
- The side skirt is 13 inches deep and made of .25 inch thick steel for greater material capacity and the strength to manage it.
- For added toughness in extreme conditions, the .60 and .70 models have a 3-inch gearbox output shaft and optional deck ring.
- Other options include LED lights, double row chain shielding, dual wheels, and for the .60 and .70 models, a shredding kit for added versatility.

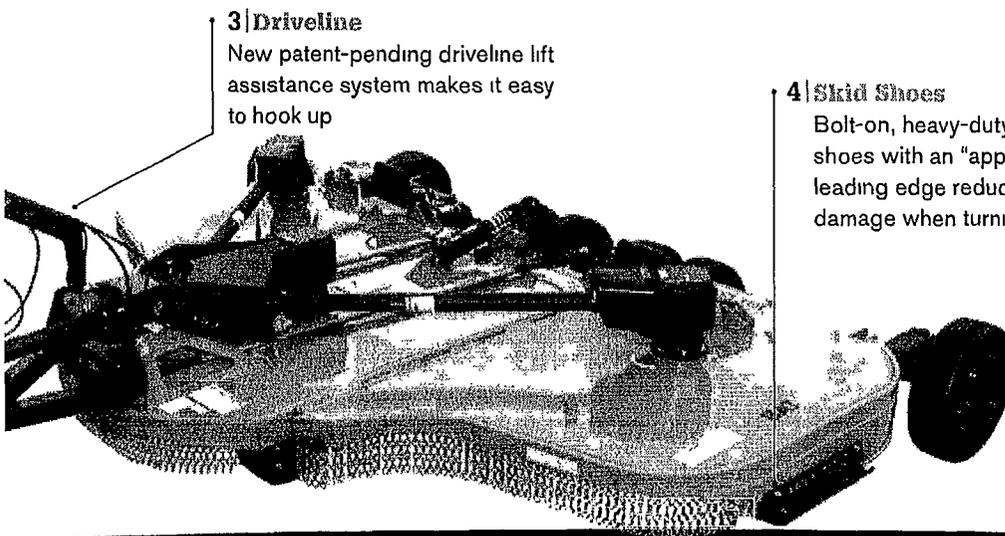

3 | Driveline

New patent-pending driveline lift assistance system makes it easy to hook up

4 | Skid Shoes

Bolt-on, heavy-duty skid shoes with an "approachable" leading edge reduce sod damage when turning

BW15.70

Shown with standard chain shielding

***NOTE:** Woods Batwing[®] models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

Batwing Specifications - Woods Best Batwing Ever

Cut Capacity	2.5" dia.	4" dia.	4.5" dia.
Weight	4,040 lbs./4,340 lbs.	4,400 lbs./4,640 lbs.	5,500 lbs./5,290 lbs.
Tongue Weight	1,150 lbs./1,200 lbs.	1,350 lbs.	1,490 lbs.
Center Deck Wing Deck	10 gauge	7 gauge	1/4"
Side Skirt Thickness		.25"	
Side Skirt Depth		13"	
Transport Width		96"	
Stump Jumper		Round	
Flex		Up - 90° Down - 22°	
Driveline Rating	Main - Cat 6 CV Wing - Cat 4	Main - Cat 6 CV Wing - Cat 4	Main - Cat 6 CV Wing - Cat 5
Splitter Gearbox Rating	210 hp	275 hp	275 hp
Wings Gearbox Rating	200 hp	225 hp	225 hp
Output Shaft	2" dia.	3" dia.	3" dia.
Gearbox Warranty		6 years	
Options	Double row chain shielding, dual wheels, LED lights	Double row chain shielding, dual wheels, LED lights, shredding kit, deck ring, spring axle, walking tandem on center yoke	Double row chain shielding, dual wheels, LED lights, shredding kit, deck ring, spring axle, full walking tandem
Bid Spec Sheets	BW 15.50 BW 10.50	BW 15.60 BW 10.60	BW 15.70 BW 10.70
Operators Manuals	BW 15.50/BW 10.50	BW 15.60/BW 10.60	BW 15.70/BW 10.70

WOODS® | A Blount International Brand
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

Follow WOODS® Online

